



DATE	SYM.	DESCRIPTION	DR	CK	REL

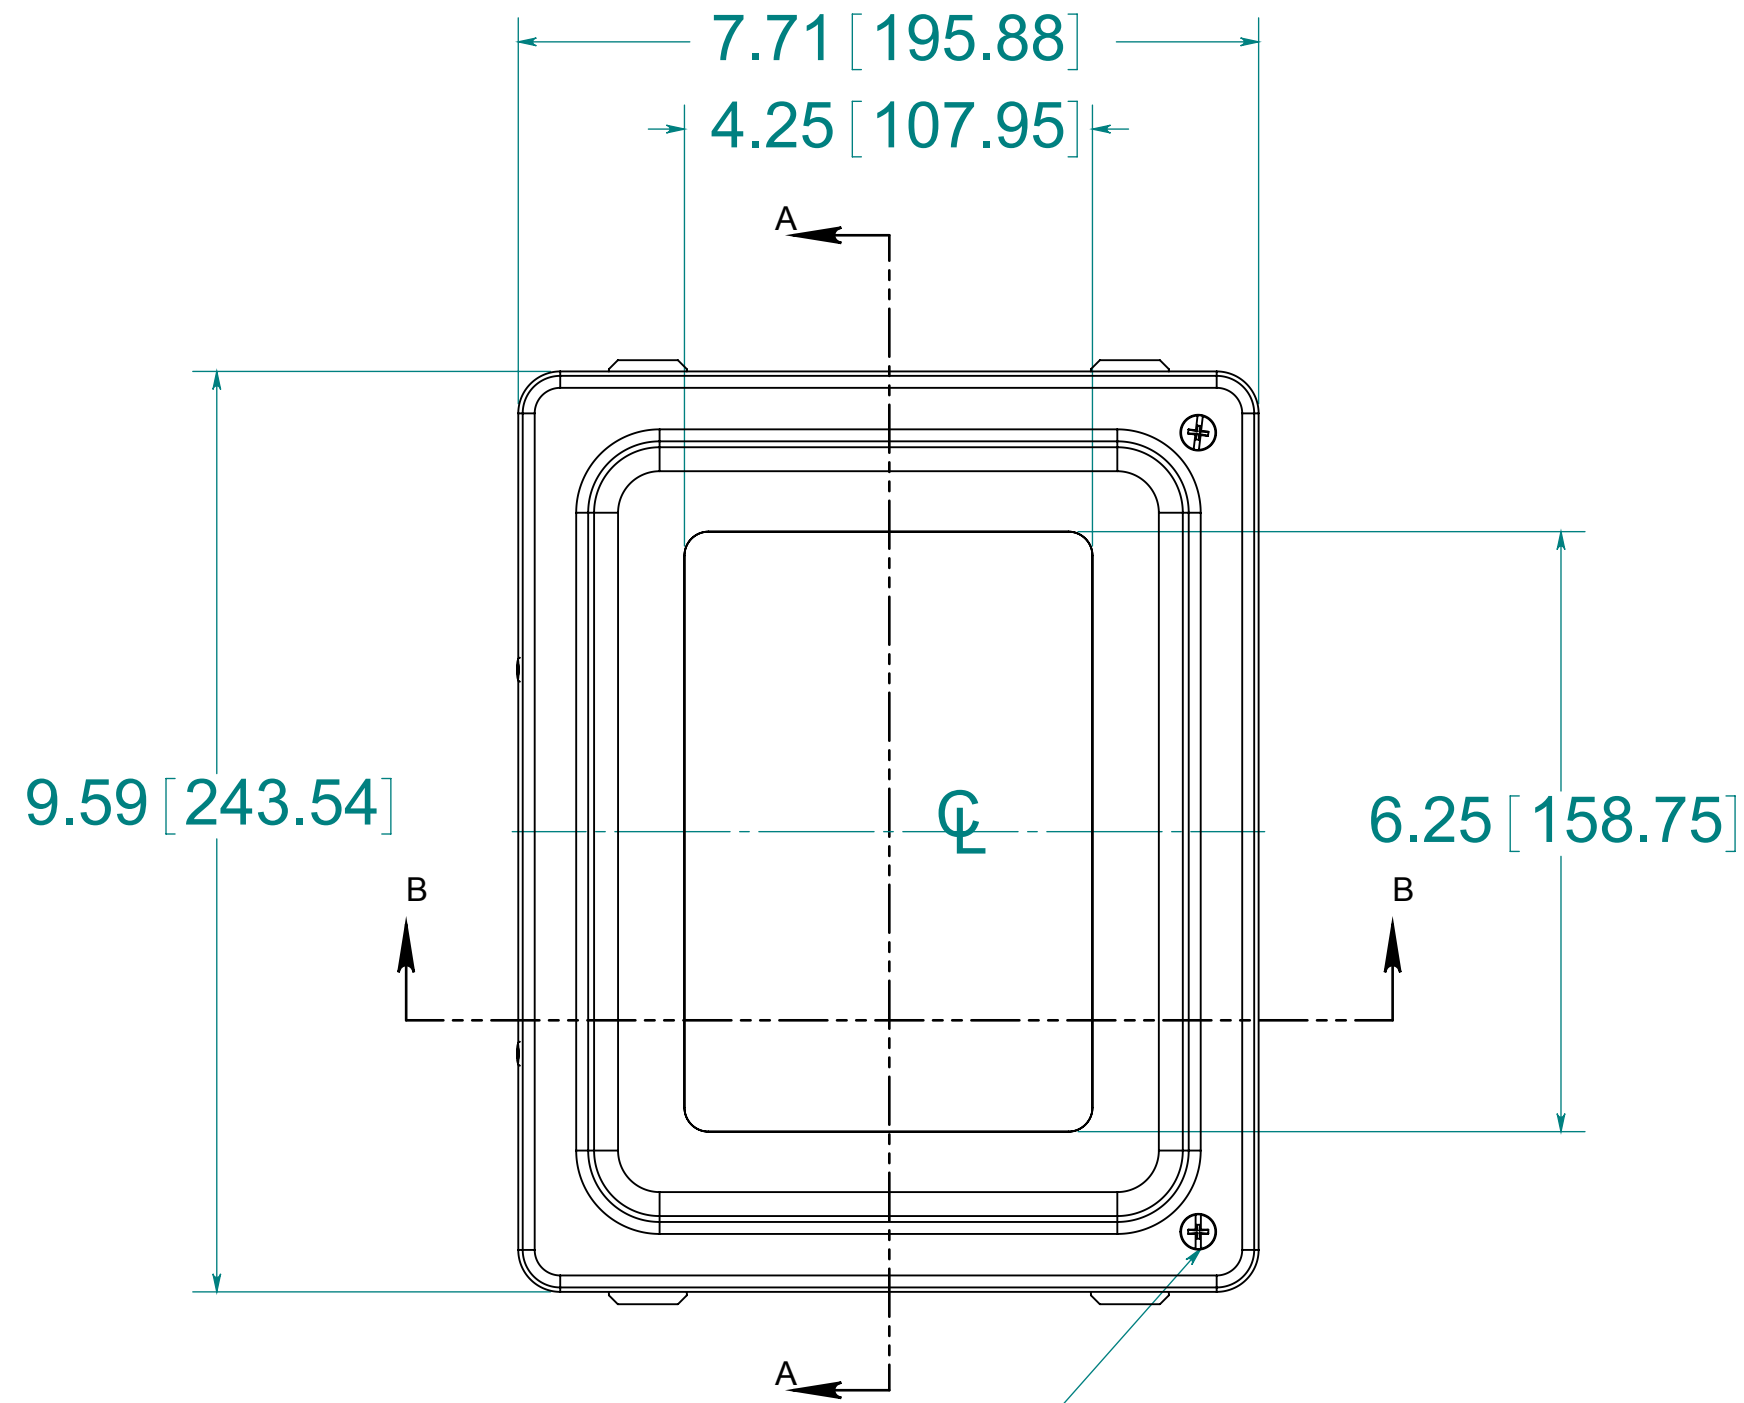


(2) EACH #10-32 BRASS INSERTS, AND STAINLESS STEEL CAPTIVE COVER SCREWS WITH RETAINING O-RING

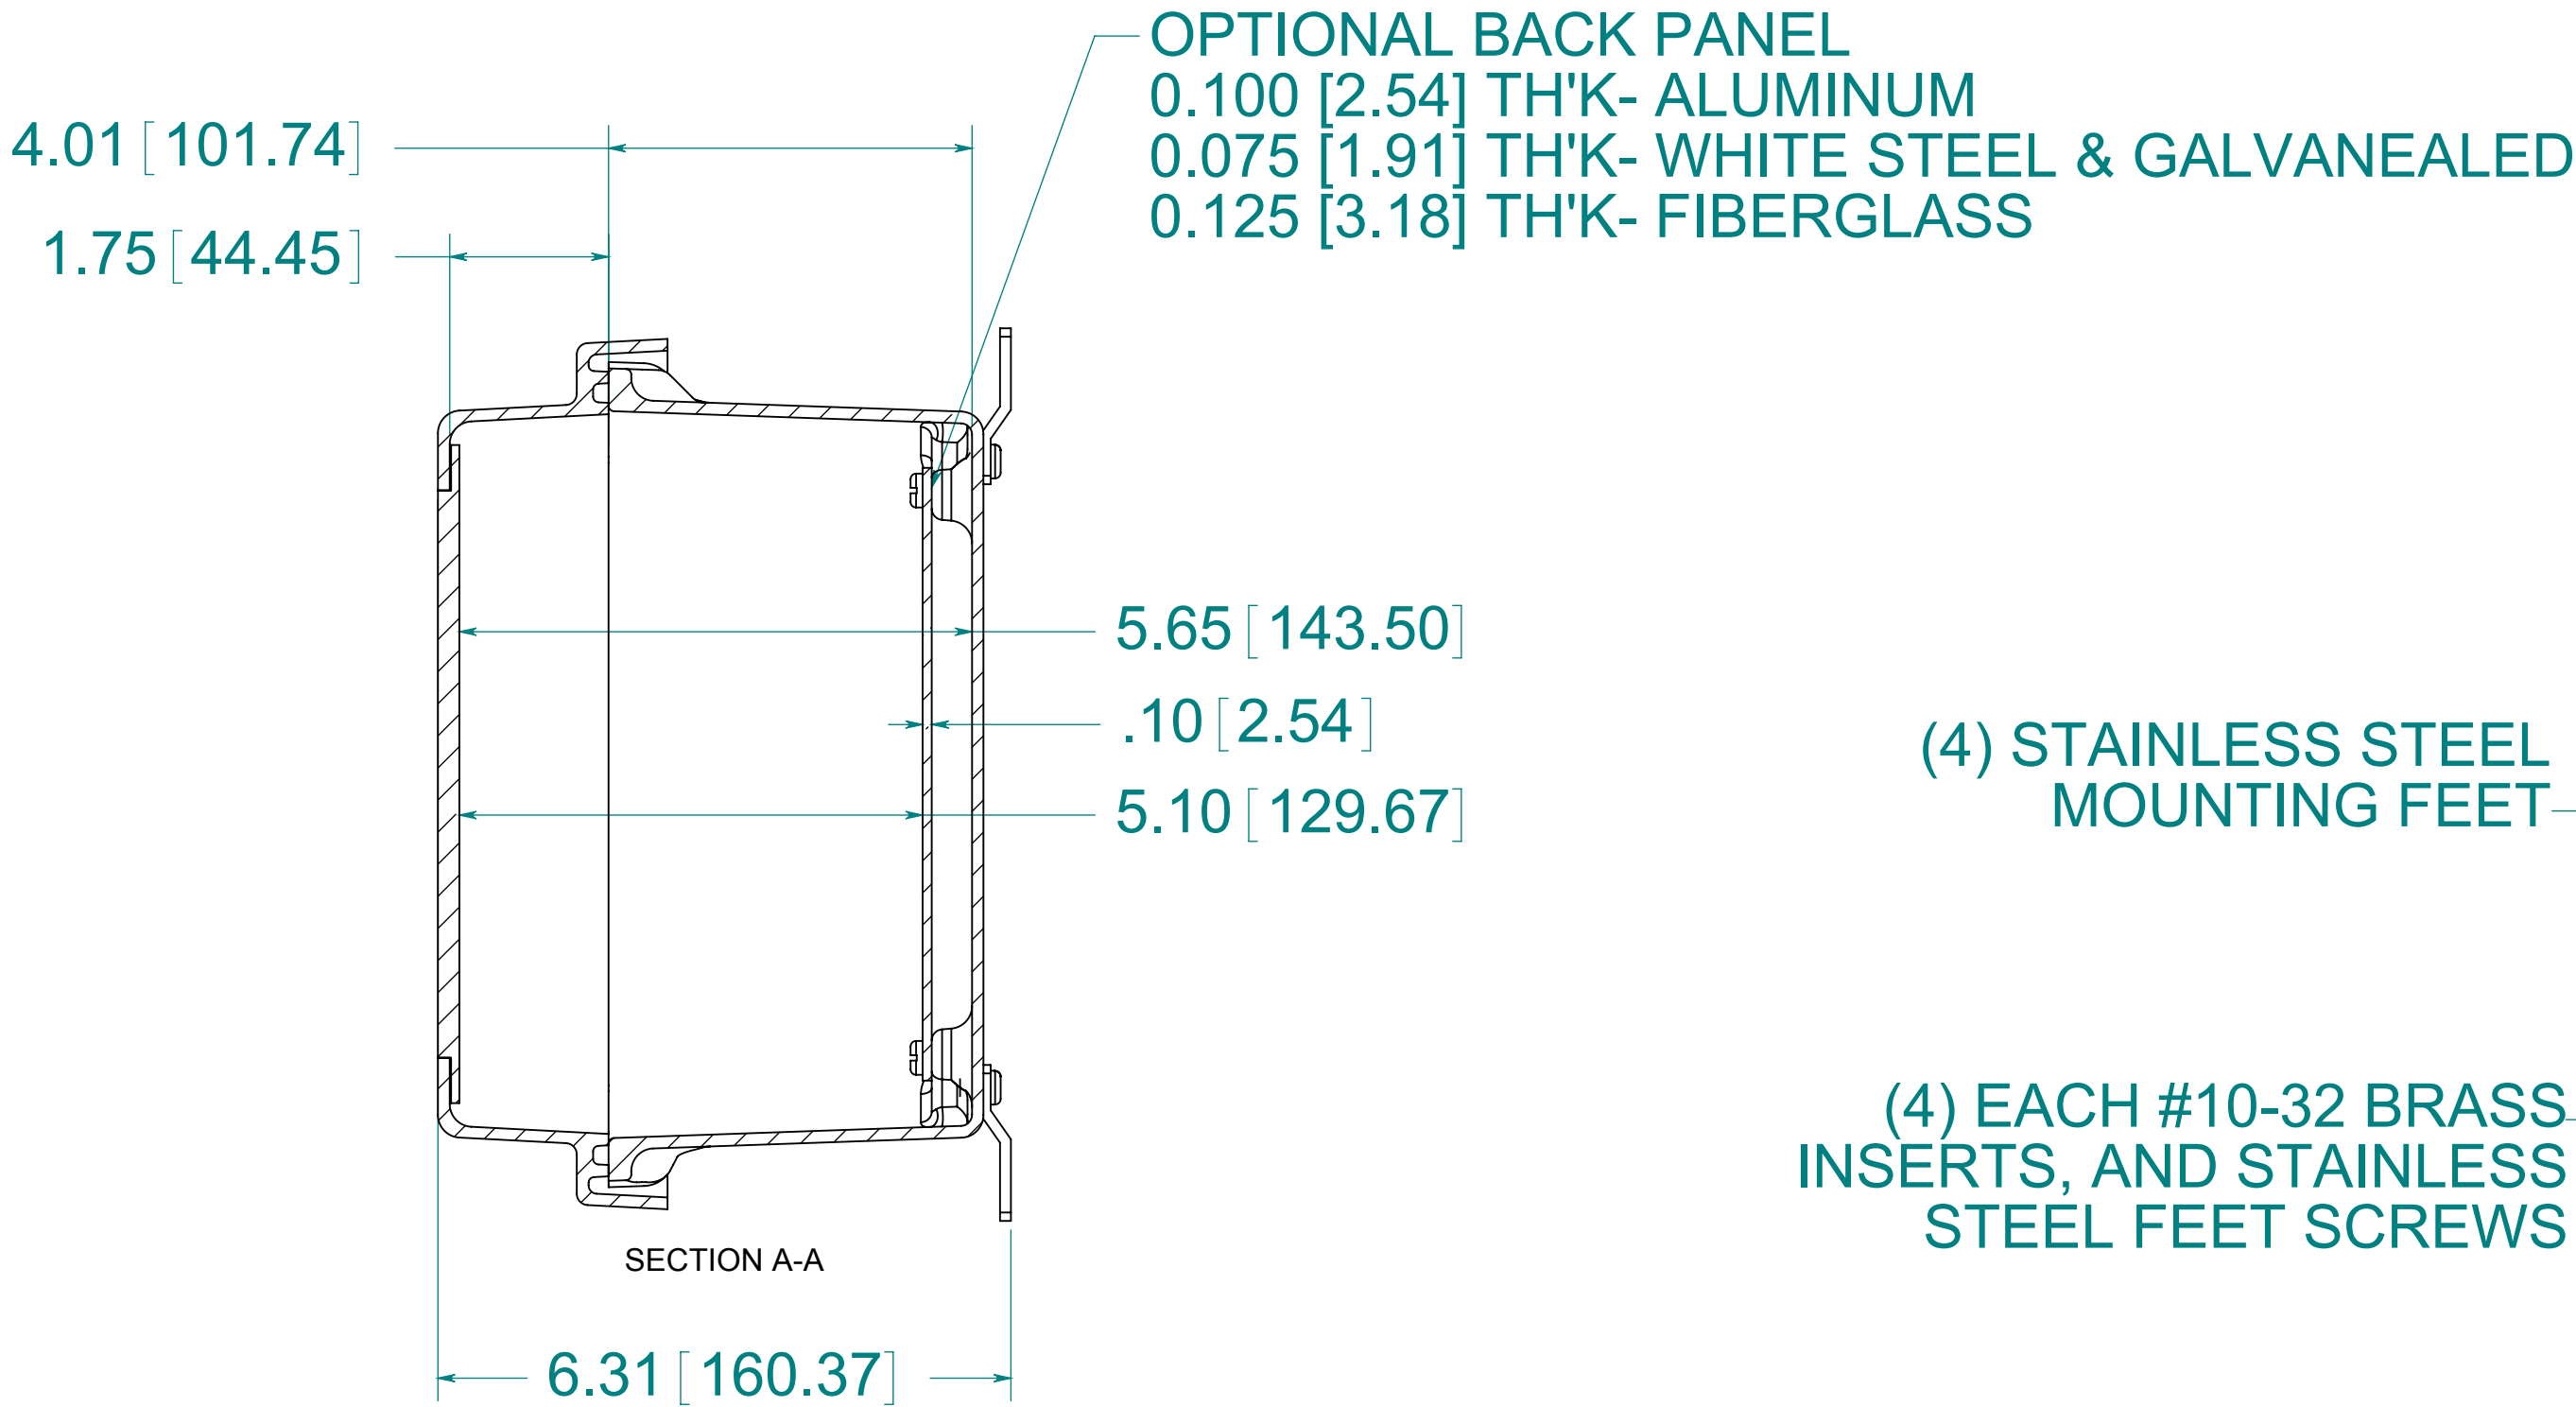


OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL & GALVANEAELED
0.125 [3.18] TH'K- FIBERGLASS

BACK VIEW
(4) STAINLESS STEEL MOUNTING FEET
(4) EACH #10-32 BRASS INSERTS, AND STAINLESS STEEL FEET SCREWS


(4) Ø.34 [8.74]

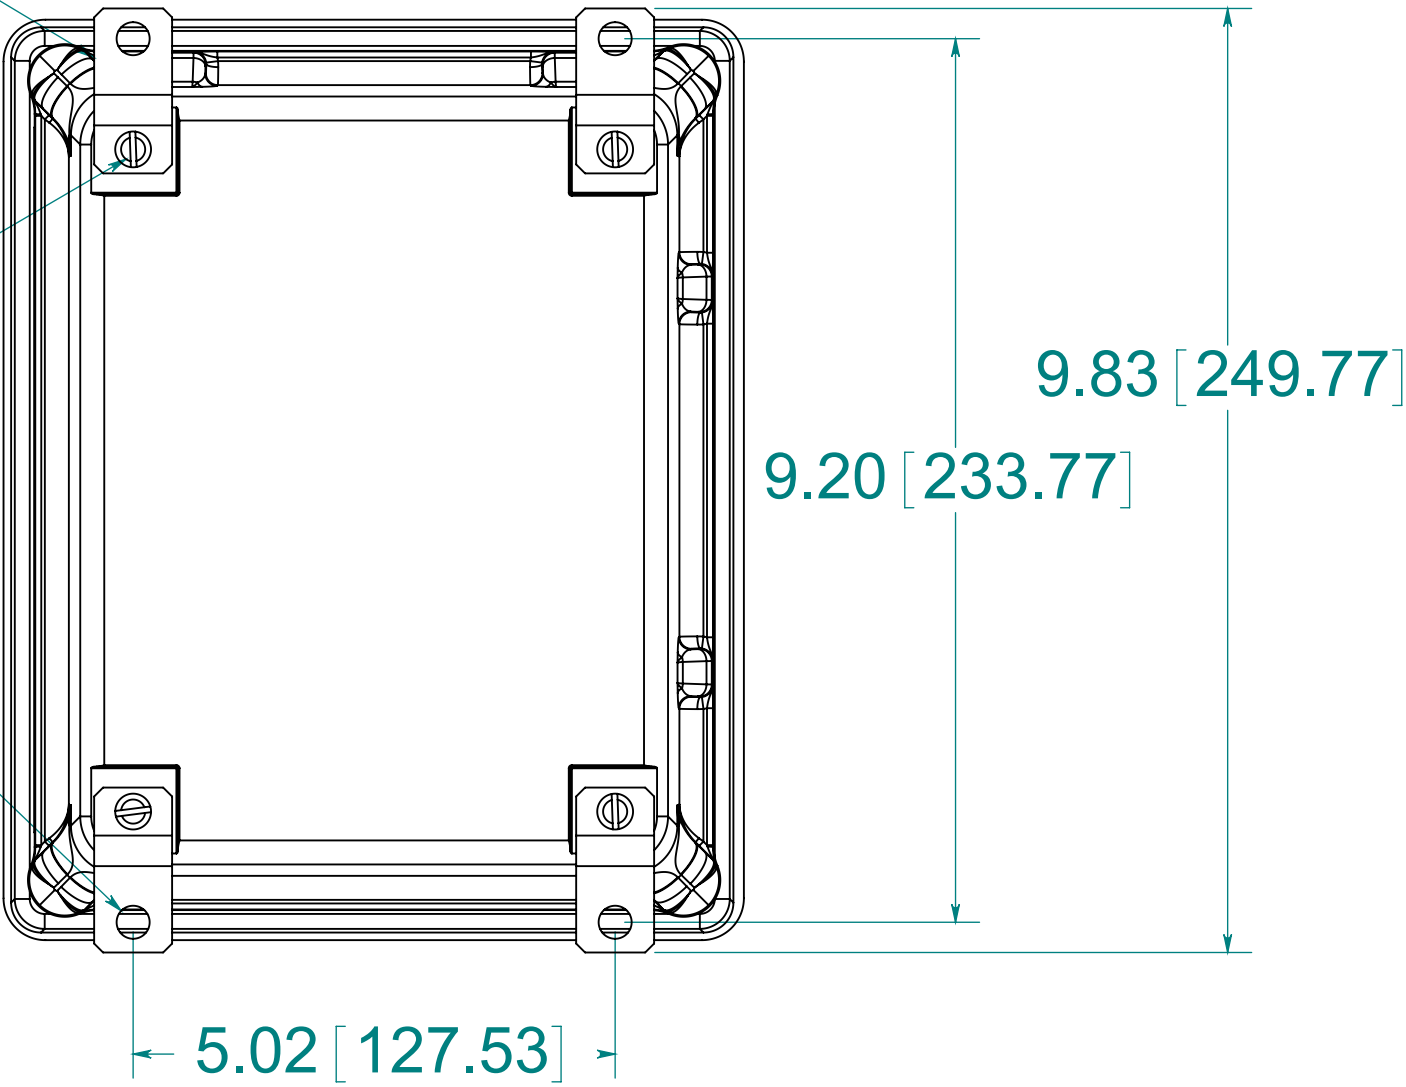

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL SHOWN

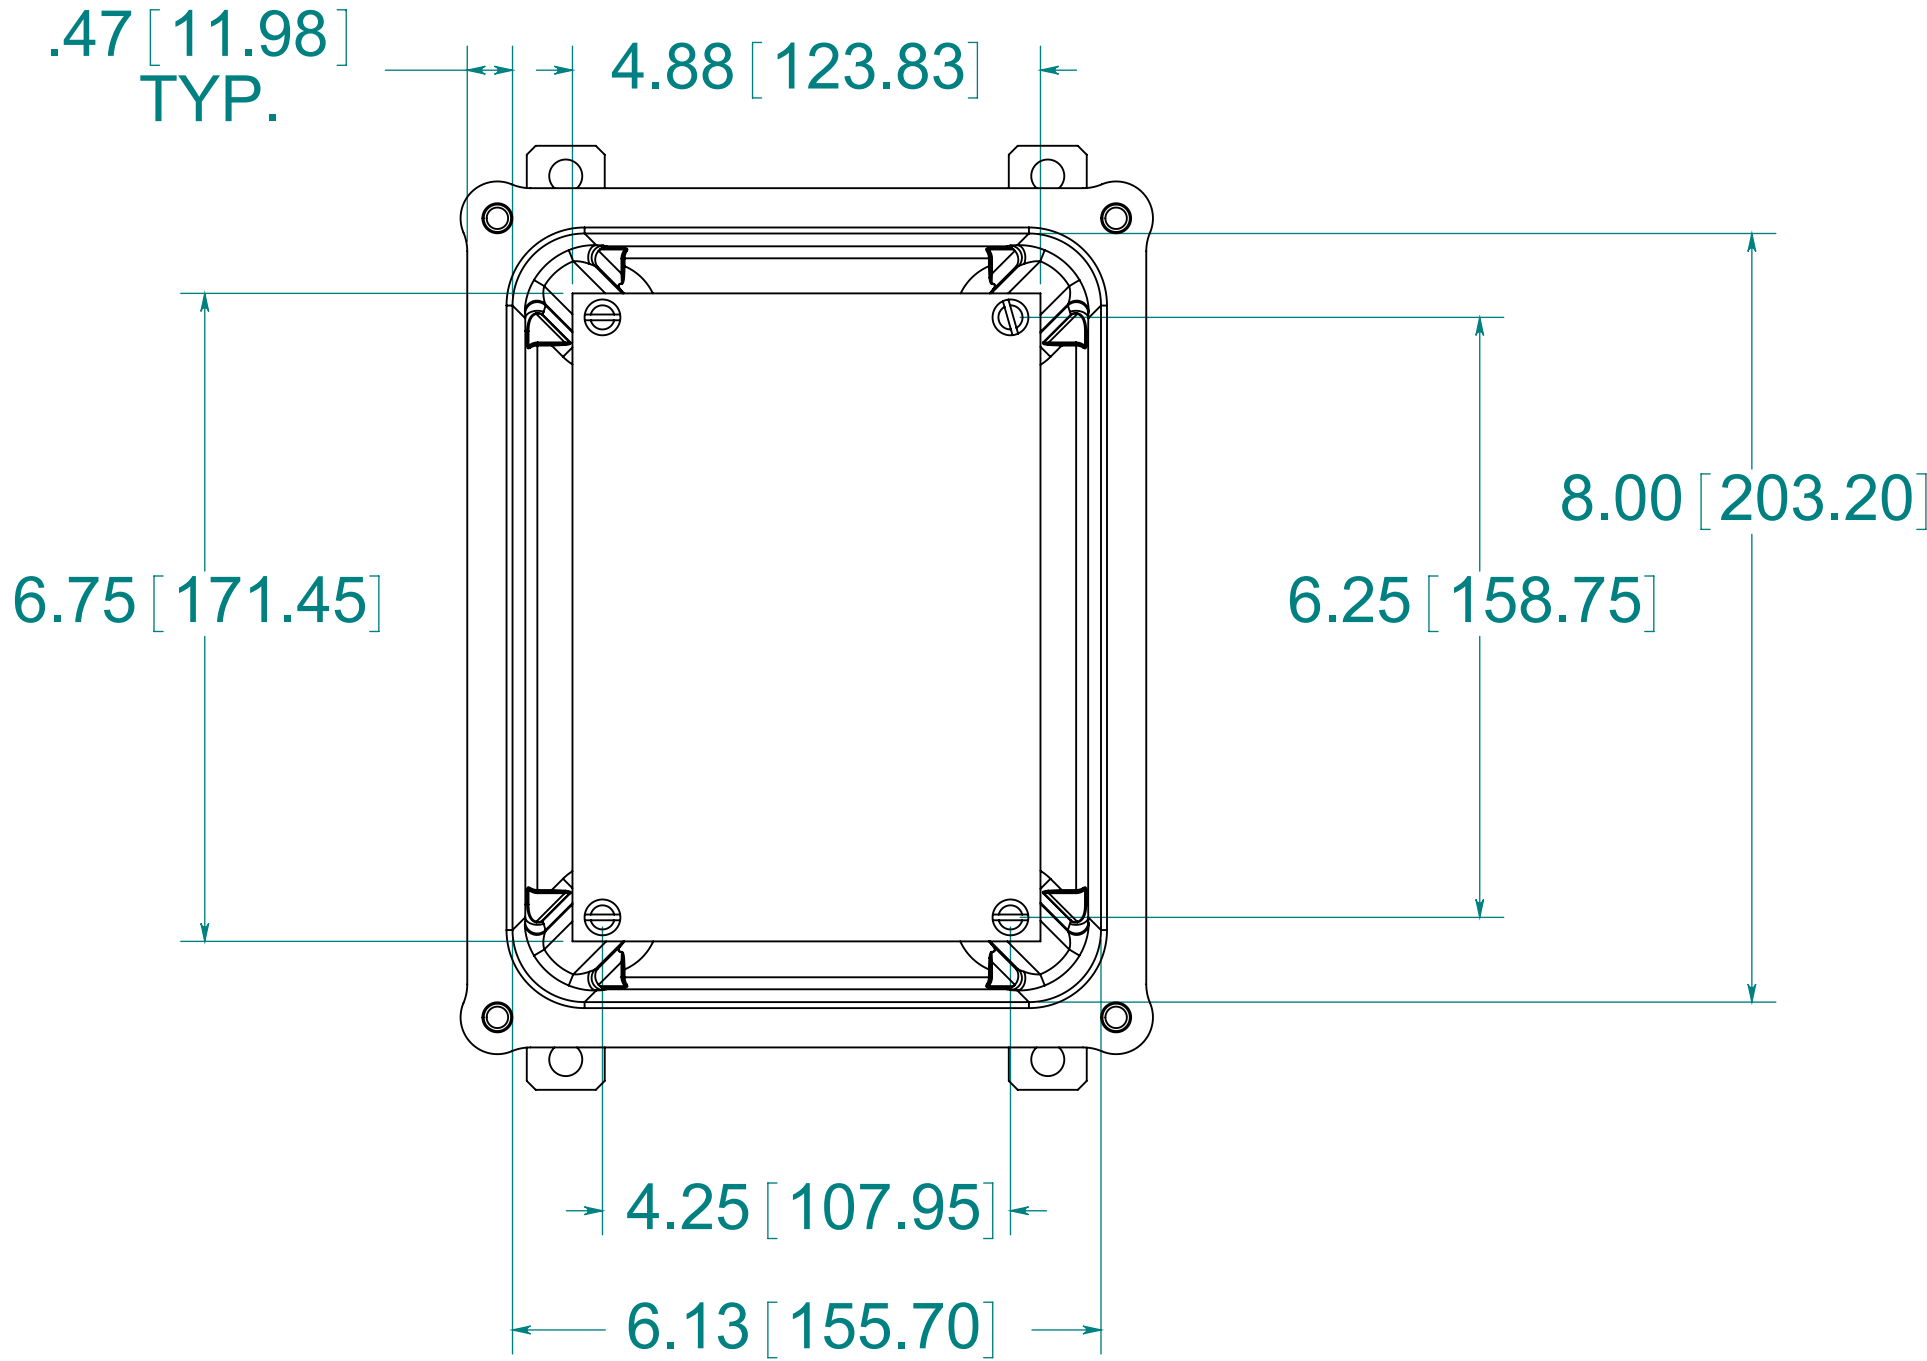


CLOSED CELL NEOPRENE GASKET
STAINLESS STEEL HINGE

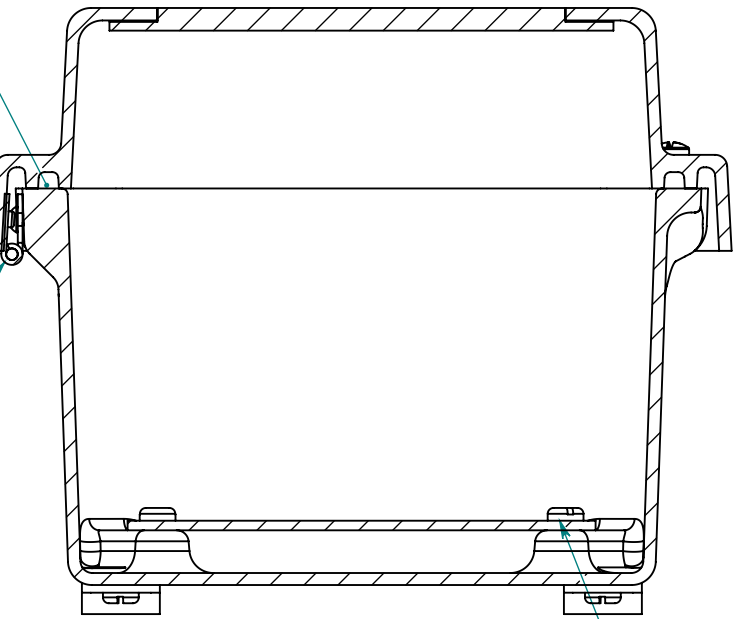

SECTION B-B

(4) EACH #10-32 BRASS INSERTS AND PLATED CARBON STEEL SCREWS

MATERIAL:
BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOW- POLYCARBONATE

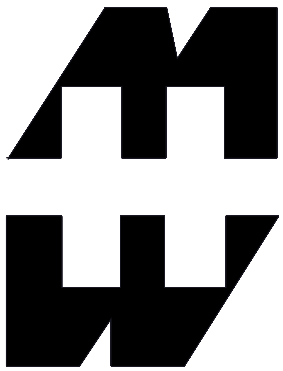

PART No. PJ864RHW
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale